

1

2

3

4

5

6

A

A

B





B

C

C

D

D

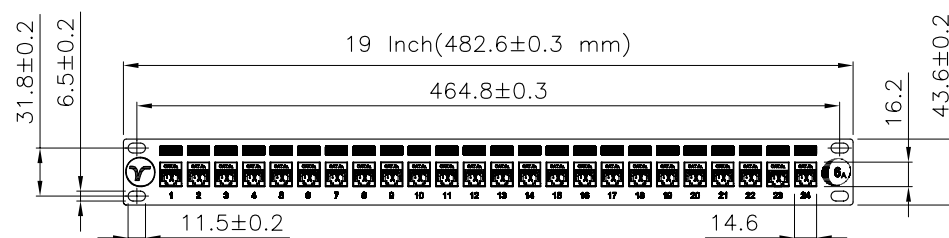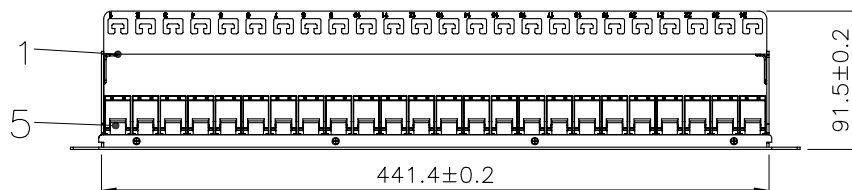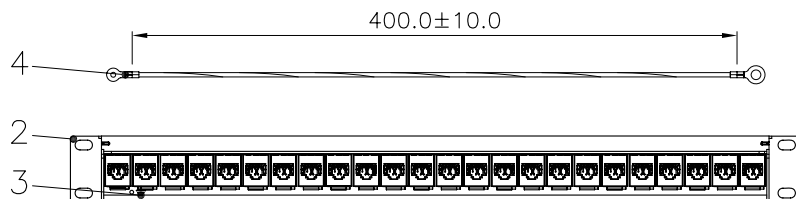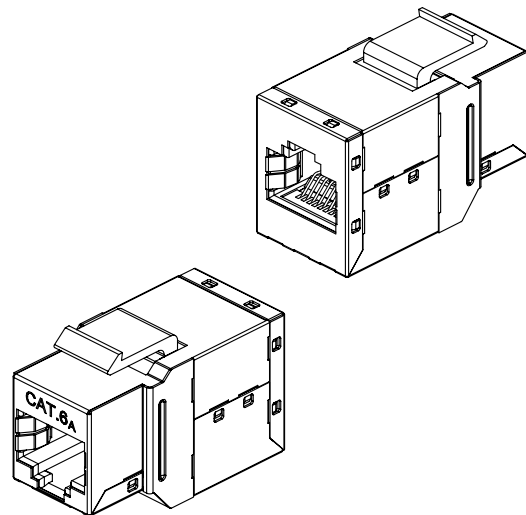

Specification :

Material :

- Support Bar : SPCC, 1.5mm thickness with Black (RAL 9005) color painted.
- Top Case : SPCC, 1.5mm thickness with Black (RAL 9005) color painted.
- Base Case : SPCC, 1.5mm thickness 5~8um nickel plate.
- Ground Cable : 18 AWG Wire, with Green/Yellow striped color, length 40 cm.
- Keystone Jack :
 - RJ45 Jack Housing : ABS+PC, UL 94V-0, with Black color.
 - Jack Bracket Set : PC, UL 94V-2, Transparent color.
 - RJ45 Jack Shield : Bronze with Nickel plated.
 - RJ45 Jack Contact material & finished :
 - Phosphor Bronze.
 - Contact area : Min. 3 mm 50 micro-inch Gold plated over Nickel plated.

Performance :

- Insertion force : 30N max. (IEC 60603-7-5)
- Retention strength : 7.7 kg between Jack and Plug.
- Operating temperature : -10°C to 60°C. (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
- Life(mating cycles) :
 - * Jack : 750 cycles min. (ISO/IEC 11801, IEC 60603-7-5)
- The 10G channel transmission performance is in compliance with TIA/EIA 568B.2-10 10G standard.

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		09.APR.2011		KLi							
	CHECK		09.APR.2011		Maer							
	APPROVAL		09.APR.2011		Yty							
			DATE		NAME		ITEM NO.: 72 3408					
	SCALE		1/5 (A4)		UNIT		mm		DES.: 24P FTP KEYSTONE PANEL W/ SUPPORT BAR			
			DRAWING NO.		AJCEB0111100315PKJF24+KJ9AS—C6A(SA1)							
			DRAWING CLASSIFICATION						SHEET			1 OF 1

1

2

0

3

4

10cm

5

6